

FORM PTO 1509 (REV. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <b>60130-1371</b>	
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>10/089030</b>	
INTERNATIONAL APPLICATION NO. <b>PCT/EP00/09526</b>		INTERNATIONAL FILING DATE <b>September 28, 2000</b>		PRIORITY DATE CLAIMED <b>September 28, 1999</b>	
TITLE OF INVENTION <b>VEHICLE DOOR</b>					
APPLICANT(S) FOR DO/EO/US <b>Rainer Grimm, et al.</b>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). a. <input type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input checked="" type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).  <b>Items 11 to 20 below concern document(s) or information included:</b> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment. 14. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input checked="" type="checkbox"/> Other items or information: <b>Certificate of Mailing EL 747 232 219 US</b>					



60130-1371  
00MRA0030

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant: Rainer Grimm, et al.  
Serial No.: Unknown  
Filed: Herewith  
Priority: PCT/EP00/09526 Filed: September 28, 2000  
DE 199 46 307.7 Filed: September 28, 1999  
DE 199 46 311.5 Filed: September 28, 1999  
DE 200 10 204.4 Filed: June 9, 2000  
Group Art Unit: Unknown  
Examiner: Unknown  
Title: VEHICLE DOOR

**PRELIMINARY AMENDMENT**

Box PCT  
Assistant Commissioner of Patents  
Washington, D.C. 20231

Dear Sir:

Please amend the application in the following particulars prior to Examination.

**IN THE SPECIFICATION:**

Page 1, after the title and above line 1, please insert the following section heading:

**BACKGROUND OF THE INVENTION**

Amended page 2, line 7, please insert the following section heading:

**SUMMARY OF THE INVENTION**

Amended page 4 and page 5, please amend the paragraph bridging these pages as follows:

Inasmuch as the term "U-shaped-structure" is used, this means, in the sense of the invention, that this structure forms at least part of a frame structure 10 and a profile bar 10A is part of said U-shaped-structure at least at one of its sides. Said U-shaped-structure maybe completed to form a complete loop necessary. The U-shape may open toward any edge of the door but preferably opens to the top. The open edge maybe closed by a further profile bar or element, e.g. stamping, to form a completed loop. Said U-shaped-structure maybe formed in different ways, particularly by bending a profile bar into a U-shaped form; however, the legs of the U-shape maybe connected together by a multiplicity of other elements (instead of a bended curve element), e.g. by other or same profiles, other stampings or moldings or die-castings, with appropriate fixings in the corner areas as required. The oblong profile used for the U-shaped-structure may also be discontinuous, particularly in the vicinity of the motor of a window-regulator or maybe jointed by one or several other elements which form the disconuity, e.g. a separate mounting plate, molding or die-casting fitted, which may joy discontinuous parts of the profiles together.

Page 5, line 14, please insert the following section heading:

**BRIEF DESCRIPTION OF THE DRAWINGS**

Amended page 6, line 21, please insert the following section heading:

**DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT**

Page 10, please amend the first full paragraph on lines 4 to 10 as follows:

Such a profile, as well as the profiles according to Figures 3 and 5, may have, at least partially, viewing surfaces in the vehicle door, so that a complete or partial profile trim panel can be omitted, which may be advantageous, particularly for the upper part of the frame serving as a window panel guide frame in the examples of a vehicle door shown in Figures 1A and 6, since side coverings of the frame structure as such are not absolutely necessary in this area.

Page 10, please amend the second full paragraph on lines 12-31 as follows:

In the embodiments according to Figures 3 and 5, it is possible to align the exterior surface of a window pane 22 with an exterior surface of the profile 10A, so that between the window pane 22 and the window frame 10, steps can be avoided which are disruptive visually and/or with respect to air flow. In the example according to Figure 5, the window pane 22 has toward the interior side a large contact surface with respect to the profile 10A which, not expressly shown in the drawing, can be used as a sealing surface; for example, for accommodating a sealing profile. A visually very advantageous window coupling with a pressure/traction element 20 is achieved in this example by means of a coupling member 24 which grips from outside through a slotted area of the guide element 16 into the profile 10A and there is connected with the pressure/traction element 20. An angular area of the coupling member 234, extending out of the guide element 16 parallel to the window 22, makes possible its connection with the window; for example, by gluing. Such a coupling member may be very short in the direction of movement, in particular, several such coupling members may be provided along the guide element 16. Advantages with respect to stability, however, are also possibly brought about by an oblong coupling member, extending along the guide element 16, which member is connected with the window pane 22 along a greater or even the entire length of the guide element of the window.

60130-1371  
00MRA0030

Please insert the following paragraph at the end of page 13:

The foregoing description is only exemplary of the principles of the invention. Many modifications and variations of the present invention are possible in light of the above teachings. The preferred embodiments of this invention have been disclosed, however, so that one of ordinary skill in the art would recognize that certain modifications would come within the scope of this invention. It is, therefore, to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specially described. For that reason the following claims should be studied to determine the true scope and content of this invention.

Please delete the text on page 14.

**IN THE CLAIMS:**

Page 15, before the first claim, please insert the section heading:

--What is claimed is:--

Please delete claims 1-11.

Please add claims 12-22:

12. (NEW) A vehicle door comprising:

an interior shell and an exterior shell defining an interior space, and a frame structure which forms a U-shaped structure provided with at least one guide element for a window regulator arrangement, wherein said U-shaped structure is made from a profile bar which supports and reinforces said vehicle door.

13. (NEW) The vehicle door, in accordance with claim 12, wherein said U-shaped structure is provided with a motor.

14. (NEW) The vehicle door, in accordance with claim 13, wherein said window regulator arrangement includes drive cables which are received in said guide elements and extend from said motor to a window pane.

15. (NEW) The vehicle door, in accordance with claim 14, wherein said window regulator arrangement further includes coupling members which connect said drive cables to said window pane.

16. (NEW) The vehicle door, in accordance with claim 15, wherein said coupling members are glued to said window pane.

60130-1371  
00MRA0030

17. (NEW) The vehicle door, in accordance with claim 15, wherein said coupling members are formed to correspond with said guide elements.

18. (NEW) The vehicle door in accordance with claim 12, wherein said profile bar includes a plurality of parallel guide elements.

19. (NEW) The vehicle door in accordance with claim 12, wherein a window pane moves vertically and laterally, said window pane being aligned with said exterior panel when in a closed position.

20. (NEW) The vehicle door, in accordance with claim 12, wherein said profile bar is made of aluminium.

21. (NEW) The vehicle door, in accordance with claim 12, wherein said frame structure is planked on both an inner surface and an outer surface by said inner shell and said exterior shell, respectively.

22. (NEW) The vehicle door, in accordance with claim 12, wherein lateral surfaces of said frame structure are covered by at least one of said interior shell and said outer shell.

23. (NEW) The vehicle door, in accordance with claim 12, wherein an edge of a window pane is received in said at least one guide element.

60130-1371  
00MRA0030**IN THE ABSTRACT:**

Please replace the abstract as follows:


A vehicle door, consisting of an interior shell and a respective exterior shell defining an interior space of a door on both sides and further contains a frame structure, the lateral surfaces of the frame structure are covered by at least one of the interior shell and the respective exterior shell. In order to make this vehicle door comparatively lightweight but rigid while using parts of a window-regulator as structural parts of the vehicle door the frame structure consists at least in part of a profile bar, bent into a U-shape as viewed from the side and opening to the top of the vehicle door. Said profile bar is provided with guide elements for a window-regulator arrangement.

**REMARKS**

Applicant respectfully requests examination of this application.

Respectfully submitted,

**CARLSON, GASKEY & OLDS, P.C.**



Karin H. Butchko  
Registration No. 45,864  
Attorneys for Applicant  
400 West Maple Road, Suite 350  
Birmingham, Michigan 48009  
(248) 988-8360

Dated: March 26, 2002

**VERSION WITH MARKINGS TO SHOW CHANGES MADE****SPECIFICATION**

Page 1, after the title and above line 1, please insert the following section heading:

**BACKGROUND OF THE INVENTION**

Amended page 2, line 7, please insert the following section heading:

**SUMMARY OF THE INVENTION**

Amended page 4 and page 5, please amend the paragraph bridging these pages as follows:

Inasmuch as the term "U-shaped-structure" is used, this means, in the sense of the invention, that this structure forms at least part of a frame structure 10 and a profile bar 10A is part of said U-shaped-structure at least at one of its sides. Said U-shaped-structure maybe completed to form a complete loop necessary. The U-shape may open toward any edge of the door but preferably opens to the top. The open edge maybe closed by a further profile bar or element, e.g. stamping, to form a completed loop. Said U-shaped-structure maybe formed in different ways, particularly by bending a profile bar into a U-shaped form; however, [he] the legs of the U-shape maybe connected together by a multiplicity of other elements (instead of a bended curve element), e.g. by other or same profiles, other stampings or moldings or die-castings, with appropriate fixings in the corner areas as required. The oblong profile used for the U-shaped-structure may also be discontinuous, particularly in the vicinity of the motor of a window-regulator or maybe jointed by one or several other elements which form the disconuity, e.g. a separate mounting plate, molding or die-casting fitted, which may joy discontinuous parts of the profiles together.

Page 5, line 14, please insert the following section heading:

**BRIEF DESCRIPTION OF THE DRAWINGS**

Amended page 6, line 21, please insert the following section heading:

**DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT**

Page 10, please amend the first full paragraph on lines 4 to 10 as follows:

Such a profile, as well as the profiles according to Figures 3 and 5, may have, at least partially, viewing surfaces in the vehicle door, so that a complete or partial profile trim panel can be omitted, which may be advantageous, particularly for the upper part of the frame serving as a window panel guide frame in the examples of a vehicle door shown in Figures 1A[,] and 6 [and 7], since side coverings of the frame structure as such are not absolutely necessary in this area.

Page 10, please amend the second full paragraph on lines 12-31 as follows:

In the embodiments according to Figures 3 and 5, it is possible to align the exterior surface of a window pane 22 with an exterior surface of the profile 10A, so that between the window pane 22 and the window frame 10, steps can be avoided which are disruptive visually and/or with respect to air flow. In the example according to Figure 5, the window pane 22 has toward the interior side a large contact surface with respect to the profile 10A which, not expressly shown in the drawing, can be used as a sealing surface; for example, for accommodating a sealing profile. A visually very advantageous window coupling with a pressure/traction element 20 is achieved in this example by means of a coupling member 24 which grips from outside through a slotted area of the guide element 16 into the profile 10A and there is connected with the pressure/traction element 20. An angular area of the coupling member 234, extending out of the guide element 16 parallel to the window 22, makes possible its connection with the window; for example, by gluing. Such a coupling member may be very short in the direction of movement, in particular, several such coupling members may be provided along the guide element 16. Advantages with respect to stability, however, are also possibly brought about by an oblong coupling member, extending along the guide element 16, which member is connected with the window pane 22 along a greater or even the entire length of the guide element of the window.

60130-1371  
00MRA0030

**VERSION WITH MARKINGS TO SHOW CHANGES MADE**

**CLAIMS**

Page 15, before the first claim, please insert the section heading:

--What is claimed is:--

**VERSION WITH MARKINGS TO SHOW CHANGES MADE****ABSTRACT**

Please replace the abstract as follows:

A vehicle door, consisting of an interior shell and a respective exterior shell defining an interior space of a door on both sides and further contains a frame structure [(10)], the lateral surfaces of the frame structure [(10)] are covered by at least one of the interior shell and the respective exterior shell. In order to make this vehicle door comparatively lightweight but rigid while using parts of a window-regulator as structural parts of the vehicle door the frame structure consists at least in part of a profile bar [(10A)], bent into a U-shape as viewed from the side and opening to the top of the vehicle door. Said profile bar [(10A)] is provided with guide elements for a window-regulator arrangement.

Claims

1. Vehicle door, consisting of an interior shell (12) and a respective exterior shell (14) defining an interior space (26) of a door and further contains a frame structure (10); the lateral surfaces of the frame structure (10) are covered by at least one of the interior shell (12) and the respective exterior shell (14), characterized in that the frame structure (10) contains a profile bar (10A), forming at least part of a U-shaped structure as viewed from the side and opening towards an outer edge of the vehicle door<sup>2</sup> and that said profile bar (10A) is provided with *both of the* guide elements (16) for a window-regulator arrangement.
2. Vehicle door, in accordance with Claim 1, characterized in that said U-shaped structure is provided with a window-operating motor (18) or another window drive or adapted to receive such motor or drive.
3. Vehicle door, in accordance with Claim 2, characterized in that in the guide elements (16), drive cables, especially pressure and traction elements (20) of the window-regulator arrangement are integrated; said profile bar (10A) joins said motor or drive to a window pane (22) via said profile bar.
4. Vehicle door, in accordance with anyone of the Claims 1 to 3, characterized in that a raisable/lowerable window pane (22) is provided with coupling members (24) gripping into the guide elements (16).
5. Vehicle door, in accordance with Claim 4, characterized in that the coupling member (24) is glued to a window pane (22) of the door.  
*x), said U-shaped structure taking on at least a substantial part of the support and reinforcement function of the vehicle door,*

① < For another vehicle door, the US-A-5,907,897 discloses a conventional main door body made from inner and outer sheet metals connected by hemming to form a box with an upper slide for receiving the window panel together with the whole panel guide frame. Said box continues to take nearly the whole support and reinforcement function of said vehicle door. >  
 mounting of such a vehicle door expensive and increases the weight of the vehicle door. [ < ① >

Based thereon, it is the problem of the invention to create a comparatively  
 5 lightweight vehicle door from functionally suitable component parts. The number of structural components is to be reduced, if possible.

As a solution to this problem, a vehicle door with the characteristic of Claim 1 is proposed. Such a vehicle door has a frame structure which is covered at least  
 10 on one of its sides with an inner or outer shell respectively, particularly panel elements; said frame structure consists at least in part of a profile bar, which forms at least part of a U-shaped structure as viewed from the side, for instance by bending said profile bar, and which U-shape opens towards an outer edge of the vehicle door, particularly to its top. Thereby, the U-shaped  
 15 structure may take on at least a substantial part of the support and reinforcement function of the vehicle door. It may be closed to form a complete loop as well.

However the U-shaped structure does not only provide a high degree of  
 20 stability, especially rigidity, of the vehicle door, for instance in the threshold area located at the lower edge of the door as well as its vertical and preferably parallel lateral extensions where it can accommodate the forces of the door hinges and of the door lock. The U-shaped structure - also - accommodates or even replaces essential components of a window opener arrangement -  
 25 hereinafter called a window-regulator arrangement.

In a first embodiment, the two profile portions of an upright U extend approximately parallel and provide guide elements for a window-regulator arrangement, so that known slide elements can be completely omitted.  
 30 Preferably, the U-shaped structure also accommodates a window-regulator drive; in particular, an electric motor. Furthermore, it can serve as guide

Furthermore, such a vehicle door simplifies the structural type and the mounting of important functional parts, such as window-regulator arrangements, door hinges and door lock, wherein the frame structure is in a better position than the known metal sheets <sup><②></sup> or doors to carry out a dual function, thereby saving on structural components, weight and/or mounting costs.

② <(like known from US-A-5,907,897, mentioned above)>

Inasmuch as the term "frame structure" is used, this means, in the sense of the invention, that struts or strut-like structural components, leaving between them free spaces or openings, are connected with each other. The "oblong profiles," from which the frame structure formed, may be struts stamped from a plate, such as a metal sheet, and possibly additionally formed by a deep-drawing process; the struts being interconnected. The "oblong profiles" may be as well rods, at first in straight form and produced, for example, in an extrusion or continuous casting process, which are reshaped and/or joined by bending and/or by being connected with each other to form the desired frame structure. Such profiles, produced in the extrusion or continuous casting process, are also suited as frame elements for the vehicle door when they are provided as a support structure, especially in the A-, B- and/or C-column of the vehicle body, at least at one side of the vehicle door.

Inasmuch as the term "U-shaped-structure" is used, this means, in the sense of the invention, that this structure forms at least part of a frame structure 10 and a profile bar 10A is part of said U-shaped-structure at least at one of its sides. Said U-shaped-structure maybe completed to form a complete loop necessary. The U-shape may open toward any edge of the door but preferably opens to the top. The open edge maybe closed by a further profile bar or element, e.g. stamping, to form a completed loop. Said U-shaped-structure maybe formed in different ways, particularly by bending a profile bar into a U-shaped form; however, he legs of the U-shape maybe connected together by a multiplicity of

Figure 2 shows part of an U-shaped element for a frame structure, according to Figure 1A, with an alternative profile cross section in perspective view;

5 Figure 3 shows an alternative cross sectional form of an oblong profile with window-regulator guide element in cross section;

Figure 4 shows an alternative profile cross section with window guide element;

10 Figure 5 shows an additional alternative profile cross section with window guide element;

Figure 6 shows a vehicle door in schematic side view with a window-regulator drive;

15 ~~Figure 7 shows an alternative embodiment of a vehicle door in schematic side view with a window regulator drive and~~

20 Figure 8 shows an alternative embodiment of a frame structure with window guide element in horizontal cross section.

From Figures 1A to 1C, the three main components of a vehicle door in accordance with the invention can be gathered, namely a frame structure 10 (Figure 1A), formed from oblong profiles 10A to 10D, an external view of an interior shell or trim panel 12 (Figure 1B), wherein the interior shell covers the lateral surface of the frame structure 10 visible in Figure 1A, as well as an interior view of an exterior shell 14 (Figure 1C), wherein the exterior shell covers the lateral surface opposite the lateral surface visible in Figure 1A. A horizontal cross section along the line ID-ID in the lower area of the door can be seen in Figure 1D (profile 10B being deleted for clarity reasons).

The frame structure 10, shown in Figure 1A, consists of a total of four profile sections 10A to 10D, produced in an extrusion process, with the cross section visible in Figure 2. The main component is a U-shaped profile bar 10A, formed by bending, which has parallel, approximately vertically extending lateral extensions and an approximately horizontally extending base extension and wherein a groove 16A surrounding a window-regulator guide element 16, visible in Figure 2, opens toward the interior curvature of the U-shape. The profile sections 10B to 10D, extending essentially diagonally, i.e. horizontally to diagonally, serve to reinforce the frame structure formed in the core of the U-shaped structural component 10A. They are connected with the U-shaped rod 10A in a rigid angle manner, for example, by welding or by any other known method.

*(other than in the US-A-5,907,897 as mentioned above)*

As a whole, the frame structure 10 represents the structural components determining the strength and the rigidity of the vehicle door. Therefore, it is possible to make relatively small demands regarding material selection and the strength of the interior shell 12 and the exterior shell 14. With respect to rigidity, they basically need only meet the requirements of the main function, which is to close off the interior space 26 of the door in an especially sealing manner and they must satisfy the requirements regarding the resistance to deformation and fatigue durability with respect to typical lateral stresses from the interior side of the vehicle or the exterior side of the vehicle.

While in the example according to Figures 1A to 2 the interior shell 12 already serves as an interior or trim panel of the vehicle door which, for example, is produced from a suitable non-metal, the interior covering of the frame structure 10 may, for example, also consist of a deep-drawn, so-called interior metal plate whose strength suffices for accommodating heavier or more greatly stressed functional components, particularly to serve as a pre-fabricated support module for a multitude of functional components, wherein an additional interior or trim panel satisfies the visual expectations and those regarding the

3 / 3

Fig. 6

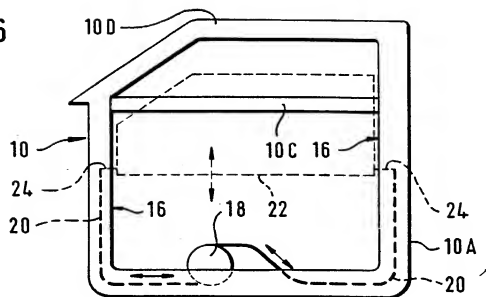


Fig. 7


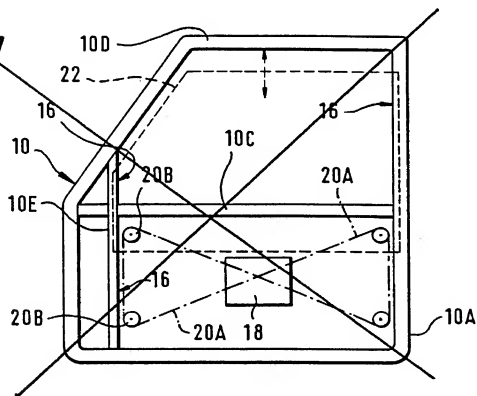


Fig. 8

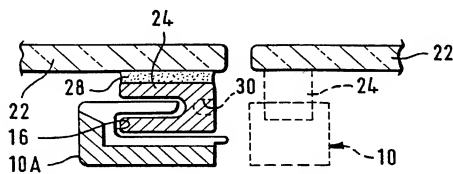

3/PR B

10/089030

1

JC10 Rec'd PCT/PTO 26 MAR 2002

**Vehicle door**

The invention relates to a vehicle door consisting of an interior shell and an outer shell adjacent to both sides of an interior door space.

5 With known vehicle doors of this type, the interior shell and the exterior shell consist of deep-drawn parts of metal sheet (interior metal sheet and exterior metal sheet) which are connected with each other along the edge; for example, by folding the exterior metal sheet around the edge of the interior metal sheet. While the outer metal sheet is primarily manufactured in accordance with a visual point of view, such as shape and color, the interior metal sheet has the

10 function of a support structure which is connected via hinges and a lock with a door frame of the vehicle and furthermore contains functional parts of the vehicle door, such as a window-regulator arrangement, a speaker, airbag and the like. Thus, the interior metal sheet has to serve a multitude of functions which, in part, require conflicting measures. Therefore, the attachment of a

15 multitude of component parts to the interior metal sheet is inescapable, wherein the component parts take over a part of the door functions, such as guide rails of a window-regulator arrangement which makes possible the up and down movement of the transport slide element of a window which can be raised and lowered. The multitude of required component parts makes the

mounting of such a vehicle door expensive and increases the weight of the vehicle door.

- 5 Based thereon, it is the problem of the invention to create a comparatively lightweight vehicle door from functionally suitable component parts. The number of structural components is to be reduced, if possible.

10 As a solution to this problem, a vehicle door with the characteristic of Claim 1 is proposed. Such a vehicle door has a frame structure which is covered at least on one of its sides with an inner or outer shell respectively, particularly panel elements; said frame structure consists at least in part of a profile bar, which forms at least part of a U-shaped structure as viewed from the side, for instance by bending said profile bar, and which U-shape opens towards an outer edge of the vehicle door, particularly to its top. Thereby, the U-shaped structure may take on at least a substantial part of the support and reinforcement function of the vehicle door. It may be closed to form a complete loop as well.

20 However the U-shaped structure does not only provide a high degree of stability, especially rigidity, of the vehicle door, for instance in the threshold area located at the lower edge of the door as well as its vertical and preferably parallel lateral extensions where it can accommodate the forces of the door hinges and of the door lock. The U-shaped structure - also - accommodates or even replaces essential components of a window opener arrangement - hereinafter called a window-regulator arrangement.

25 In a first embodiment, the two profile portions of an upright U extend approximately parallel and provide guide elements for a window-regulator arrangement, so that known slide elements can be completely omitted. Preferably, the U-shaped structure also accommodates a window-regulator drive; in particular, an electric motor. Furthermore, it can serve as guide

30

element for driving elements of the window-regulator, such as flexible pressure- and traction means, particularly for the raising and lowering of the window and, in this way, replace the function of Bowden wires, or form tubes in which drive cables are led from the motor to the guide elements of the window regulator. Thus, such a frame structure becomes multifunctional and by saving on structural components makes possible a reduction in the weight of the vehicle door.

A particularly elegant mounting and guide element of a vehicle window which can be raised and lowered, having a favorable influence on the  $C_w$ -value of the vehicle, is achieved by coupling members which connect the window with the window guide element provided on the U-shaped profile bar. With such coupling members it is, for example, possible to freely select the position of the window with respect to the exterior panel of the vehicle door; in particular, to shift the position of the window pane relatively far toward the exterior of the vehicle door. By gluing the coupling members onto the interior side of the window, particularly in the area of the edge of such a window edge molded or sprayed with a suitable synthetic material, such as polyurethane, the window guide grooves can be omitted. Coupling members, in accordance with the invention, may also be in the form of straight profile rails which grip into the guide elements provided on the frame structure, particularly in a manner corresponding to their shape.

Furthermore, coupling members of the invention may also be adjustable besides being rigid, so that the position of the window with respect to the guide rails provided on the frame structure can be changed, particularly in a lateral direction. In this way, the window pane can be transported in the closed state into a plane aligned with the outer skin of the door. In order to open the window, the same is moved laterally out of its plane in the closed state in order to subsequently be lowered completely or partially into the interior of the door. Such a window-regulator arrangement is of independent inventive significance.

Furthermore, such a vehicle door simplifies the structural type and the mounting of important functional parts, such as window-regulator arrangements, door hinges and door lock, wherein the frame structure is in a better position than the known metal sheets of doors to carry out a dual function, thereby saving on structural components, weight and/or mounting costs.

Inasmuch as the term "frame structure" is used, this means, in the sense of the invention, that struts or strut-like structural components, leaving between them free spaces or openings, are connected with each other. The "oblong profiles," from which the frame structure formed, may be struts stamped from a plate, such as a metal sheet, and possibly additionally formed by a deep-drawing process; the struts being interconnected. The "oblong profiles" may be as well rods, at first in straight form and produced, for example, in an extrusion or continuous casting process, which are reshaped and/or joined by bending and/or by being connected with each other to form the desired frame structure. Such profiles, produced in the extrusion or continuous casting process, are also suited as frame elements for the vehicle door when they are provided as a support structure, especially in the A-, B- and/or C-column of the vehicle body, at least at one side of the vehicle door.

Inasmuch as the term "U-shaped-structure" is used, this means, in the sense of the invention, that this structure forms at least part of a frame structure 10 and a profile bar 10A is part of said U-shaped-structure at least at one of its sides. Said U-shaped-structure maybe completed to form a complete loop necessary. The U-shape may open toward any edge of the door but preferably opens to the top. The open edge maybe closed by a further profile bar or element, e.g. stamping, to form a completed loop. Said U-shaped-structure maybe formed in different ways, particularly by bending a profile bar into a U-shaped form; however, the legs of the U-shape maybe connected together by a multiplicity of

## 5

other elements (instead of a bended curve element), e.g. by other or same profiles, other stampings or moldings or die-castings, with appropriate fixings in the corner areas as required. The oblong profile used for the U-shaped-structure may also be discontinuous, particularly in the vicinity of the motor of a window-regulator or maybe joined by one or several other elements which form the discontinuity, e.g. a separate mounting plate, molding or die-casting fitted, which may join discontinuous parts of the profiles together.

The above-mentioned, as well as the claimed component parts to be used in accordance with the invention and described in the examples, are not subject to any special exceptional conditions with respect to their size, shape, material selection and technical concept, so that the selection criteria known in the area of application can find application in an unlimited manner.

Additional details, characteristics and advantages of the subject invention can be gathered from the subclaims as well as from the subsequent description of the accompanying drawing in which preferred examples of the vehicle door of the invention is shown. In the drawing,

Figure 1A shows a frame structure of a vehicle door consisting of oblong profiles in sideview;

Figure 1B shows an interior shell serving as a rim panel for the same vehicle door;

Figure 1C shows an exterior shell serving as an exterior panel for the same vehicle door;

Figure 1D shows a horizontal cross section along the section line ID-ID of the vehicle door in accordance with Figure 1A to Figure 1C;

## 6

- Figure 2 shows part of an U-shaped element for a frame structure, according to Figure 1A, with an alternative profile cross section in perspective view;
- 5 Figure 3 shows an alternative cross sectional form of an oblong profile with window-regulator guide element in cross section;
- Figure 4 shows an alternative profile cross section with window guide element;
- 10 Figure 5 shows an additional alternative profile cross section with window guide element;
- Figure 6 shows a vehicle door in schematic side view with a window-regulator drive;
- 15 Figure 7 shows an alternative embodiment of a vehicle door in schematic side view with a window-regulator drive and
- Figure 8 shows an alternative embodiment of a frame structure with window guide element in horizontal cross section.
- 20

From Figures 1A to 1C, the three main components of a vehicle door in accordance with the invention can be gathered, namely a frame structure 10 (Figure 1A), formed from oblong profiles 10A to 10D, an external view of an interior shell or trim panel 12 (Figure 1B), wherein the interior shell covers the lateral surface of the frame structure 10 visible in Figure 1A, as well as an interior view of an exterior shell 14 (Figure 1C), wherein the exterior shell covers the lateral surface opposite the lateral surface visible in Figure 1A. A horizontal cross section along the line ID-ID in the lower area of the door can be seen in Figure 1D (profile 10B being deleted for clarity reasons).

25

30

The frame structure 10, shown in Figure 1A, consists of a total of four profile sections 10A to 10D, produced in an extrusion process, with the cross section visible in Figure 2. The main component is a U-shaped profile bar 10A, formed by bending, which has parallel, approximately vertically extending lateral extensions and an approximately horizontally extending base extension and wherein a groove 16A surrounding a window-regulator guide element 16, visible in Figure 2, opens toward the interior curvature of the U-shape. The profile sections 10B to 10D, extending essentially diagonally, i.e. horizontally to diagonally, serve to reinforce the frame structure formed in the core of the U-shaped structural component 10A. They are connected with the U-shaped rod 10A in a rigid angle manner, for example, by welding or by any other known method.

As a whole, the frame structure 10 represents the structural components determining the strength and the rigidity of the vehicle door. Therefore, it is possible to make relatively small demands regarding material selection and the strength of the interior shell 12 and the exterior shell 14. With respect to rigidity, they basically need only meet the requirements of the main function, which is to close off the interior space 26 of the door in an especially sealing manner and they must satisfy the requirements regarding the resistance to deformation and fatigue durability with respect to typical lateral stresses from the interior side of the vehicle or the exterior side of the vehicle.

While in the example according to Figures 1A to 2 the interior shell 12 already serves as an interior or trim panel of the vehicle door which, for example, is produced from a suitable non-metal, the interior covering of the frame structure 10 may, for example, also consist of a deep-drawn, so-called interior metal plate whose strength suffices for accommodating heavier or more greatly stressed functional components, particularly to serve as a pre-fabricated support module for a multitude of functional components, wherein an additional interior or trim panel satisfies the visual expectations and those regarding the

interior design. Naturally, such a support module, if a suitable material is selected, may also consist of a non-metal. On the other hand, it is possible to use the frame structure 10 in such a way, that functional components, such as an airbag, speaker, outside mirror and the like are connected to the frame structure itself, so that the interior shell 12 has more of a panel function than a support function. Other functional components, in particular the door hinges, are mounted as a rule only to the frame structure 10 in order to achieve an advantageous frictional connection.

The exterior shell 14, which may consist of metal sheet, a synthetic material or other suitable exterior panel material, will accommodate as a rule no functional components or only those which are subjected to little mechanical stress. At the same time, it is possible, for example, to provide lateral impact protection as a component of the exterior shell 14 on the latter's inside instead of integrating it in the frame structure 10A.

Such a vehicle door, while having a high degree of strength, may be manufactured having a comparatively light weight, particularly with a frame structure of aluminum or another light metal or of carbon fibers or other very strong but light weight materials. The same oblong profiles, from which the frame structure 10 is formed, wherein also varying profile cross sections are possible for the individual frame structure components, may, depending on the layout, also form the exterior frame, i.e., the frame of the vehicle door which is fixed to the body of the automobile, particularly the support columns (A-, B- and/or C-column), provided laterally with respect to the vehicle door or may form their supporting basic structure, thereby reducing the multitude of vehicle door components.

The other aspect of the vehicle door, in accordance with Figures 1A to 2, is the integration of a window-regulator arrangement for a window pane 22 which can be raised and lowered into the frame structure 10. In the preferred embodiment

according to Fig. 2, an electrically driven version is used: the window-regulator motor 18 is supported by the approximately horizontal U-extension of the U-shaped structure 10A and is tightly connected with it, for example, by screws, and is possibly in part introduced into the profile 10A. Drive cables serving as pressure/traction elements 20 for the raising and lowering of the window pane extend from the window-regulator drive motor 18 through the window-regulator guide elements 16, formed in the profile 10A, which may be adapted to the cross section of the drive cable.

While Figure 1A provides only a single window-regulator guide element 16 in central arrangement, in the cross sectional variation according to Figure 2, two such window-regulator guide elements are provided, so that the pressure/traction element for each window side is guided along its entire length, respectively, and is kept in the profile 10A, - not only the section of the drive cable extending from the motor 18 to the window 22, but also the drive cable section extending out of the respectively opposite motor side which, while the window is lowered, is long and when the window is raised, is short to the point of having completely disappeared. These or other, possibly additional guide grooves may, as a replacement for Bowden wire tubes, also serve for other functional parts of the vehicle door.

Such a window-regulator arrangement integrates the function of the movement and the guidance of the window 22 into the frame structure 10, wherein the actual window pane may be connected via coupling members 24 with the drive elements, especially with the pressure/traction element 20, as is indicated in Figure 1D. These and similar window-regulator arrangements can also be gathered from the subsequently described Figures 3 to 8.

Figures 3 to 5 present additional alternatives to Figures 1D and 2 for the profile cross section design of the U-shaped profile bar of a frame structure 10 having the guide elements 16. In the example according to Figure 4, an edge guide

element 16B of the window 22 is already integrated in the profile 10A. For this reason, the window can also be guided directly by the profile 10A.

5 Such a profile, as well as the profiles according to Figures 3 and 5, may have, at least partially, viewing surfaces in the vehicle door, so that a complete or partial profile trim panel can be omitted, which may be advantageous, particularly for the upper part of the frame serving as a window panel guide frame in the examples of a vehicle door shown in Figures 1A, 6 and 7, since side coverings of the frame structure as such are not absolutely necessary in  
10 this area.

In the embodiments according to Figures 3 and 5, it is possible to align the exterior surface of a window pane 22 with an exterior surface of the profile 10A, so that between the window pane and the window frame, steps can be avoided  
15 which are disruptive visually and/or with respect to air flow. In the example according to Figure 5, the window pane 22 has toward the interior side a large contact surface with respect to the profile 10A which, not expressly shown in the drawing, can be used as a sealing surface; for example, for accommodating a sealing profile. A visually very advantageous window coupling with a  
20 pressure/traction element 20 is achieved in this example by means of a coupling member 24 which grips from outside through a slotted area of the guide element 16 into the profile 10A and there is connected with the pressure/traction element. An angular area of the coupling member 24, extending out of the guide element 16 parallel to the window 22, makes  
25 possible its connection with the window; for example, by gluing. Such a coupling member may be very short in the direction of movement, in particular, several such coupling members may be provided along the guide element 16. Advantages with respect to stability, however, are also possibly brought about by an oblong coupling member, extending along the guide element 16, which  
30 member is connected with the window pane 22 along a greater or even the entire length of the guide element of the window.

Coupling members 24 may be components of the window pane 22 and connected with the pressure/traction element 20, which will be connected with the window pane 22, or they may be separate components which are or will be connected with both the pressure/traction element and the window pane.

The characteristic feature of the example according to Figure 3, as compared with the preceding embodiments, consists in a different coupling member 24. This not only makes possible a drive connection between the pressure/traction element 20 and the window 22 in the direction of raising and lowering, but also in the lateral direction of the window 22. While in the example according to Figure 5 an aligned arrangement of the window pane with respect to the window frame in the upper part of the window is possible while the window edge, abutting against the interior space of the door, requires a sill protruding toward the exterior, it is possible according to the example of Figure 3 to realize a vehicle door in which the window pane and the parts of the exterior panel of the door adjacent to the window pane in its closed state can be aligned on all adjacent sides with the window 22, and accordingly, in the area of the sill as well.

For this purpose, the window pane 22, in the example according to Figure 3, is moved laterally by a lateral swiveling of the coupling members 24, out of its thrust position, which is aligned with the exterior panel, and is subsequently lowered into the interior space of the hollow door. The process is reversed during the raising and subsequent closing of the window. This aspect of the invention is - also independent of a U-shaped profile bar - of independent significance.

Figure 8 shows an additional embodiment of a window arrangement and window guide element of a vehicle door that is possible to realize on a window frame above the interior space of the door, i.e. above the door sill without

sacrificing the quality of the guide element, the seal and/or strength of the window. In the case of the example shown in Figure 8, the coupling members 24 and oblong door profile components 10A are formed so as to correspond to each other and form along a predeterminable length, a good and also comparatively tight window guidance element. Actually, it suffices when the coupling member 24 is located entirely inside the interior of the door, also when the window is closed, i.e. it does not extend into the glass area visible from the outside. However, it is also possible to arrange the coupling member 24 entirely or partially in the visible area of the window, i.e. when it is closed. Such a window is particularly easy to install in the vehicle door from above. The coupling member 24 represents a reinforcement element of the window pane and may be glued, for example, on the glass of the window pane in a known way; for example, by means of polyurethane, or may be bonded with same by spraying along the edge of the window.

In the case of windows made of a deformable material, for example, polycarbonate or acrylic, the coupling member may also be a one-piece component of the window. The profile of the coupling member itself or a profile which has been altered in its cross section and which connects to the coupling member may also surround the window pane (in its closed position) along its lateral as well as upper edge in order to achieve an increase in strength. In the same way, it is possible to shape the coupling member 24 by means of a shaping process or the like; for example, an exterior groove 30, in such a way that it can accommodate a window seal and/or, in the closed state, grip into corresponding frame components of the vehicle body, thus giving to the window pane special support while in the completely closed state, particularly in its upper area. This is advantageous not only during high speeds, but also possibly as a protection against break-ins and for other reasons.

Also, the embodiment according to Figure 8 makes it possible to mount the window in such a way that, as viewed from the outside, it has a frameless

13

appearance. As can be seen on the right in Figure 8, next to the vehicle door shown in section on the left, another vehicle door or a vehicle body area may abut against a fixed window pane, wherein the adjacent window panes 22 are aligned with each other, leaving only a small crack. For the containment  
5 support and possible movement of the window, similar structural components as with the vehicle door shown left in Figure 8, may be used.

It can be seen in Figure 6 that the means for moving the window; in particular, drive cables, also in the form of Bowden wires, can extend at least in part  
10 outside the oblong profiles and/or may also be loosely placed inside the oblong profiles.

Figure 7 shows another vehicle door with a window-regulator arrangement of independent inventive significance, wherein typical Bowden controls (traction element 20A), which are guided around deflection rolls or guide pulleys (deflection elements 20B) for the purpose of operating windows and are moved by a conventional window-regulator drive 18, are provided. The traction elements are connected to the window pane 22 by means of clamping devices or the like in a known manner. Here, a window-regulator arrangement of typical construction is involved. The characteristic feature in the embodiment according to Figure 7 consists in that the window-regulator guide elements are completely omitted because parallel profile bars 10A, 10E guide the parallel window edges which are facing each other, wherein these profiles form structural components of the door, particularly a frame structure 10, as described in connection with  
20 the other examples.  
25

Reference symbols

	10	frame structure
	10A	U-shaped profile bar
5	10B	oblong profile
	10C	oblong profile
	10D	oblong profile
	10E	oblong profile
	12	interior shell
10	14	exterior shell
	16	window-operating guide element
	16A	groove
	16B	edge guide element
	18	window-operating drive motor
15	20	pressure/traction element
	20A	traction element
	20B	deflection roll
	22	window pane
	24	coupling member
20	26	interior door space
	28	connection means [bonding means]
	30	groove

Claims

1. Vehicle door, consisting of an interior shell (12) and a respective exterior shell (14) defining an interior space (26) of a door and further contains a frame structure (10); the lateral surfaces of the frame structure (10) are covered by at least one of the interior shell (12) and the respective exterior shell (14), characterized in that the frame structure (10) contains a profile bar (10A), forming at least part of a U-shaped structure as viewed from the side and opening towards an outer edge of the vehicle door and that said profile bar (10A) is provided with guide elements (16) for a window-regulator arrangement.
2. Vehicle door, in accordance with Claim 1, characterized in that said U-shaped structure is provided with a window-operating motor (18) or another window drive or adapted to receive such motor or drive.
3. Vehicle door, in accordance with Claim 2, characterized in that in the guide elements (16), drive cables, especially pressure and traction elements (20) of the window-regulator arrangement are integrated; said profile bar (10A) joins said motor or drive to a window pane (22) via said profile bar.
4. Vehicle door, in accordance with anyone of the Claims 1 to 3, characterized in that a raisable/lowerable window pane (22) is provided with coupling members (24) gripping into the guide elements (16).
5. Vehicle door, in accordance with Claim 4, characterized in that the coupling member (24) is glued to a window pane (22) of the door.

## 16

6. Vehicle door, in accordance with Claim 4 or 5, characterized in that the coupling member (24) is formed to match with the window-regulator guide elements (16).
- 5 7. Vehicle door, in accordance with one of Claims 1 to 6, characterized in that several guide elements (16) are provided in an approximately parallel arrangement in said profile bar (10A) and serve to accommodate the drive elements of a raisable and lowerable window pane (22).
- 10 8. Vehicle door with window-regulator arrangement, in accordance with one of the Claims 1 to 7, characterized in that a window pane can be vertically raised and lowered as well as laterally moved, particularly into a closing position aligned with the exterior panel, and can be moved out of same into a raising and lowering position.
- 15 9. Vehicle door, in accordance with anyone of the Claims 1 to 8, characterized in that said profile bar (10A) consists of aluminum.
- 20 10. Vehicle door, in accordance with anyone of the Claims 1 to 9, characterized in that the same profiles which form the profile bar (10A) are provided on the side of the vehicle door as a support structure of the A-, B- and/or C-column.
- 25 11. Vehicle door, in accordance with anyone of the Claims 1 to 10, characterized in that said frame structure (10) is planked on both of its inner and outer surfaces by said inner shell (12) and said exterior shell (14) respectively.

Express Mailing No. EL 747 232 219 US

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number  
WO 01/23201 A1

- (51) International Patent Classification\*: B60J 5/04
- (21) International Application Number: PCT/EP00/09526
- (22) International Filing Date:  
28 September 2000 (28.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
199 46 307.7 28 September 1999 (28.09.1999) DE  
199 46 311.5 28 September 1999 (28.09.1999) DE  
200 10 204.4 9 June 2000 (09.06.2000) DE

[DE/DE]: Sachsenhäuser Landwehrweg 225, 60599 Frankfurt (DE). KÖLLNER, Harald [DE/DE]; Blütenweg 15, 63674 Altenstadt (DE). STRAUSS, Klaus-Dieter [DE/DE]; Nordendorferweg 27, 38110 Braunschweig (DE). WURM, Georg [DE/DE]; Usinger Weg 38b, 61350 Bad Homburg (DE). DREWICK, Daniel [DE/DE]; Rodheimer Strasse 11, 60385 Frankfurt am Main (DE). HERWIG, Arnd, G. [DE/DE]; Röderweg 24, 96148 Baunbach (DE). HOF, Patrick [DE/DE]; Eichgarten 14, 35043 Marburg (DE). DOBSON, Simon, Blair [GB/GB]; 5 the Corniche, Sandgate, Folkestone, Kent CT20 3TA (GB). KEYES, Gregory [GB/GB]; 28 Inverclyde Road, Handsworth Wood, Birmingham B20 2LJ (GB). SCHANG, Kenneth, W. [US/US]; 46131 Academy, Plymouth, MI 48170 (US).

(74) Agent: KÖNIG PALGEN SCHUMACHER KLUIN; Frühlingstrasse 43A, 45133 Essen (DE).


(71) Applicant (for all designated States except US): MERITOR AUTOMOTIVE GMBH [DE/DE]; Hanauer Landstrasse 338, 60314 Frankfurt am Main (DE).

(72) Inventors; and  
(75) Inventors/Applicants (for US only): GRIMM, Rainer


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,

[Continued on next page]

(54) Title: VEHICLE DOOR

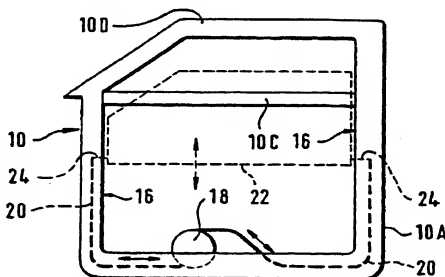

(57) Abstract: A vehicle door, consisting of an interior shell and a respective exterior shell defining an interior space of a door on both sides and further contains a frame structure (10), the lateral surfaces of the frame structure (10) are covered by at least one of the interior shell and the respective exterior shell. In order to make this vehicle door comparatively lightweight but rigid while using parts of a window-regulator as structural parts of the vehicle door the frame structure consists at least in part of a profile bar (10A), bent into a U-shape as viewed from the side and opening to the top of the vehicle door. Said profile bar (10A) is provided with guide elements for a window-regulator arrangement.

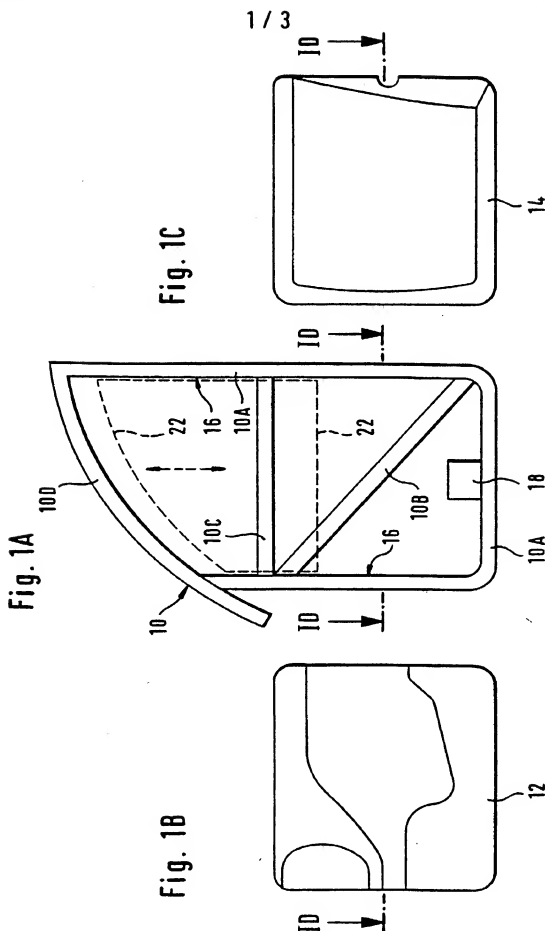

2 / 3

Fig. 10

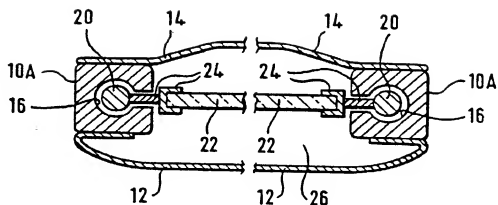


Fig. 2

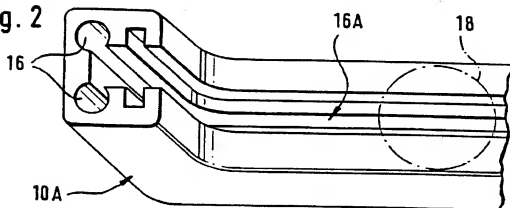


Fig. 3

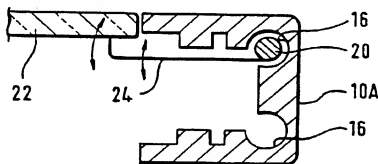


Fig. 4




Fig. 5




Fig. 6

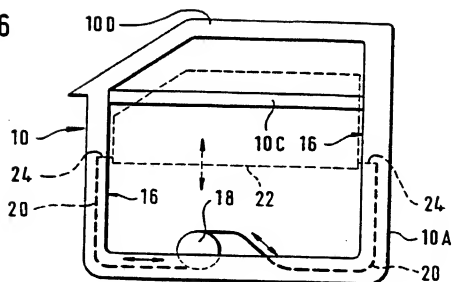


Fig. 7


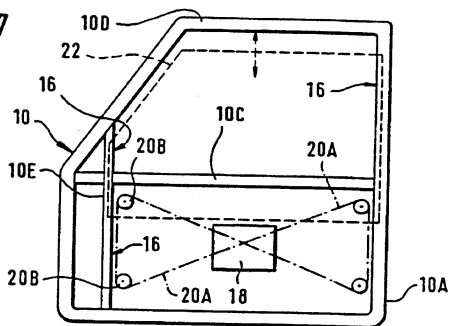


Fig. 8



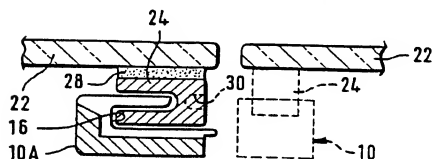

10089030 . 082602

Please type a plus sign (+) inside this box → ☐

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

PTO/SB/01 (10-00)  
Approved for use through 10/31/2002. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

# **DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)**

☐ Declaration Submitted with Initial Filing **OR** ☒ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

**Attorney Docket Number** 60130-1371

**First Named Inventor** Rainer Grimm

## **COMPLETE IF KNOWN**

**Application Number** 10 / 089,030

**Filing Date** March 26, 2002

**Group Art Unit** Unknown

**Examiner Name** Unknown

**As a below named inventor, I hereby declare that:**

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

VEHICLE DOOR

(Title of the Invention)

the specification of which

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY) 03/26/2002 as United States Application Number or PCT International

Application Number 10/089,030 and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES NO
PCT/EP00/09526	Europe	09/28/2000	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
DE 199 46 307.7	Germany	09/28/1999	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
DE 199 46 311.5	Germany	09/28/1999	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
DE 200 10 204.4	Germany	06/09/2000	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☒

10089030, 082602

PTO/SB/01 (10-00)

Approved for use through 10/31/2002, OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION — Utility or Design Patent Application**

Direct all correspondence to:

Customer Number  
or Bar Code Label

026096

OR ☐

Correspondence address below

Name Karin H. ButchkoAddress 400 W. Maple RoadAddress Suite 350City BirminghamState MichiganZIP 48009Country United StatesTelephone (248) 988-8360Fax (248) 988-8363

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR :

☐ A petition has been filed for this unsigned inventorGiven Name Rainer  
(first and middle (if any))Family Name Grimm  
or SurnameInventor's  
SignatureRainer GrimmDKDate 09/09/02Residence: City Frankfurt

State

Country GermanyCitizenship GermanyMailing Address Sachsenhauser Landwehrweg 225

Mailing Address

City Frankfurt

State

ZIP D-60599Country Germany

NAME OF SECOND INVENTOR:

☐ A petition has been filed for this unsigned inventorGiven Name Harald  
(first and middle (if any))Family Name Kollner  
or Surname

Inventor's

Signature

40.00 CP

Date

Residence: City Altenstadt

State

Country Germany

Citizenship

Mailing Address Blutenweg 15

Mailing Address

City Altenstadt

State

ZIP D-63674Country Germany☒ Additional inventors are being named on the 3 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.

Please type a plus sign (+) inside this box → ☒

10089030.082602

PTO/SB/01 (10-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION — Utility or Design Patent Application**Direct all correspondence to: ☒ Customer Number or Bar Code Label 026096 OR ☐ Correspondence address below

Name Karin H. Butchko

Address 400 W. Maple Road

Address Suite 350

City Birmingham

State Michigan

ZIP 48009

Country United States

Telephone (248) 988-8360

Fax (248) 988-8363

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR :

☐ A petition has been filed for this unsigned inventorGiven Name Rainer  
(first and middle (if any))Family Name Grimm  
or SurnameInventor's  
Signature

Date

Residence: City Frankfurt

State

Country Germany

Citizenship

Mailing Address Sachsenhauser Landwehrweg 225

Mailing Address

City Frankfurt

State

ZIP D-60599

Country Germany

NAME OF SECOND INVENTOR:

☐ A petition has been filed for this unsigned inventorGiven Name Harald  
(first and middle (if any))Family Name Kollner  
or SurnameInventor's  
Signature

Date

Residence: City Altenstadt

State

Country Germany

Citizenship Germany

Mailing Address Blütenweg 15

Mailing Address

City Altenstadt

State

ZIP D-63674

Country Germany

☒ Additional inventors are being named on the 3 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.

Please type a plus sign (+) inside this box → ☐

PTO/SB/02C (3-97)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION****REGISTERED PRACTITIONER  
INFORMATION  
(Supplemental Sheet)**

Name	Registration Number	Name	Registration Number
M. Lee Murrah	27,460		
Theodore W. Olds	<del>33,080</del>		
John E. Carlson	<del>37,794</del>		
David J. Gaskey	<del>37,139</del>		
Kerrie A. Laba	<del>42,777</del>		
William S. Gottschalk	<del>44,130</del>		
David L. Wisz	46,350		
Karin H. Butchko	<del>45,864</del>		
John M. Siragusa	<del>46,174</del>		
Anthony P. Cho	<u>47,209</u>		



Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

AUG 26 2002  
**DECLARATION****ADDITIONAL INVENTOR(S)****Supplemental Sheet**Page 1 of 3**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Klaus-Dieter

Strauss

Inventor's  
Signature*Klaus-Dieter Strauss**DS*Date *July 21, 2002*

Residence: City

Braunschweig

State

Country

Germany

Citizenship

Germany

Mailing Address Nordendorfweg 27

Mailing Address

City Braunschweig

State

ZIP D-38110

Country Germany

**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Georg

Wurm

Inventor's  
Signature

Date

Residence: City Bad Homburg

State

Country Germany

Citizenship

Mailing Address Usinger Weg 38b

Mailing Address

City Bad Homburg

State

ZIP D-61350

Country Germany

**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Daniel

Drewnick

Inventor's  
Signature

Date

Residence: City Frankfurt

State

Country Germany

Citizenship

Mailing Address Rodheimer Strasse 11

Mailing Address

City Frankfurt

State

ZIP D-60385

Country Germany

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

Approved for use through 10/31/2002. OMB 0651-0032  
 U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
 Using the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION

ADDITIONAL INVENTOR(S)  
 Supplemental Sheet  
 Page 1 of 3

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Klaus-Dieter

Straub

Inventor's  
Signature

Date

Residence: City Braunschweig

State

Country Germany

Citizenship

Mailing Address Nordendorfsweg 27

Mailing Address

City Braunschweig

State

ZIP D-38110

Country Germany

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Georg

Wurm

Inventor's  
Signature

Date

Residence: City Bad Homburg

State

Country Germany

Citizenship Germany

Mailing Address Usinger Weg 38b

Mailing Address

City Bad Homburg

State

ZIP D-61350

Country Germany

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Daniel

Drewniok

Inventor's  
Signature

Date

Residence: City Frankfurt

State

Country Germany

Citizenship Germany

Mailing Address Rodheimer Strasse 11

Mailing Address

City Frankfurt

State

ZIP D-60385

Country Germany

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



10089030,082602

Please sign a plus sign (+) inside this box → ☐

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION****ADDITIONAL INVENTOR(S)****Supplemental Sheet**Page 2 of 3**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Arnd G.

Herwig

Inventor's  
SignatureDate 24.07.2002

Residence: City

Baunach

State

Country

Germany

Citizenship

Germany

Mailing Address  
Roderweg 24

Mailing Address

City

Baunach

State

ZIP D-96148

Country

Germany

**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Patrick

Hof

Inventor's  
Signature

Date

Residence: City

Marburg

State

Country

Germany

Citizenship

Mailing Address  
Eichgarten 14

Mailing Address

City

Marburg

State

ZIP D-35043

Country

Germany

**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Simon Blair

Dobson

Inventor's  
Signature

Date

Residence: City

Folkestone

State

Kent

Country

Great Britain

Citizenship

Mailing Address  
5, the CornicheMailing Address  
Sandgate

City

Folkestone

State

Kent

ZIP CT20 3TA

Country

Great Britain

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



10089030.082602

Approved for use through 10/31/2002. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION

ADDITIONAL INVENTOR(S)  
Supplemental Sheet  
Page 2 of 3

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Arnd G.

Herwig

Inventor's  
Signature

Date

Residence: City Baunach

State

Country Germany

Citizenship

Mailing Address Roderweg 24

Mailing Address

City Baunach

State

ZIP D-96148

Country Germany

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Patrick

Hof

Inventor's  
Signature

Date 22. 07. 2002

Residence: City Marburg

State

Country Germany

Citizenship Germany

Mailing Address Eichgarten 14

Mailing Address

City Marburg

State

ZIP D-35043

Country Germany

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Simon Blair

Dobson

Inventor's  
Signature

Date

Residence: City Folkestone

State Kent

Country Great Britain

Citizenship

Mailing Address 5, the Corniche

Mailing Address Sandgate

City Folkestone

State Kent

ZIP CT20 3TA

Country Great Britain

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



10089030, 082602

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION****ADDITIONAL INVENTOR(S)****Supplemental Sheet**Page 2 of 3

<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Arnd G.		Herwig	
Inventor's Signature		Date	
Residence: City	Baunach	State	Country Germany
Mailing Address		Citizenship	
Roderweg 24			
Mailing Address			
City	Baunach	State	ZIP D-96148
		Country Germany	
<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Patrick		Hof	
Inventor's Signature		Date	
Residence: City	Marburg	State	Country Germany
Mailing Address		Citizenship	
Eichgarten 14			
Mailing Address			
City	Marburg	State	ZIP D-35043
		Country Germany	
<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Simon Blair		Dobson	
Inventor's Signature		Date	
Residence: City	Folkestone	State Kent	Country Great Britain
Mailing Address		Citizenship	
5, the Corniche		U.K.	
Mailing Address			
Sandgate			
City	Folkestone	State Kent	ZIP CT20 3TA
		Country Great Britain	

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



10089030.082602

Please affix a plus sign (+) inside this box → ☐

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION****ADDITIONAL INVENTOR(S)****Supplemental Sheet**Page 3 of 3**Name of Additional Joint Inventor, if any:**☒ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Gregory

Keyes

Inventor's  
Signature

Date

Residence: City Birmingham CHN

State

Country Great Britain

Citizenship

Mailing Address 28 Inverclyde Road, Handsworth Wood

Mailing Address

City Birmingham

State

ZIP B20 2LJCountry Great Britain**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Kenneth W

Schang

Inventor's  
SignatureDate 17 July, 2002Residence: City PlymouthState MICountry USACitizenship USAMailing Address 46131 Academy

Mailing Address

City PlymouthState MIZIP 48170Country USA**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Inventor's  
Signature

Date

Residence: City

State

Country

Citizenship

Mailing Address

Mailing Address

City

State

ZIP

Country

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.